



# Technical Service Information Bulletin

October 28, 2002

Title:

## SHORT PIN INSTALLATION DURING PDS

Models:

'03 GX 470

PRODUCT GENERAL INFORMATION  
PG015-02


**Introduction** To minimize battery discharge during transportation and storage, the Short Pin has been removed at the assembly plant and temporarily stored in the Engine Compartment Relay Block. During Pre-Delivery Service (PDS), the Short Pin needs to be re-installed into its original location.

**Applicable Vehicles**


- 2003 model year **GX 470** vehicles.

**Installation Procedure**

1. The removed Short Pin is stored in the blank space of the Relay Block in the Engine Compartment.

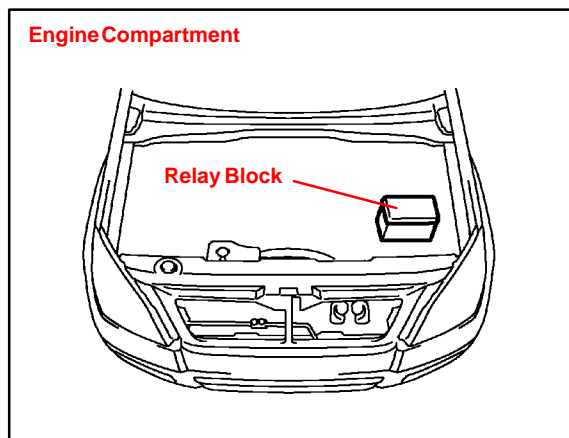

2. During Pre-Delivery Service (PDS) install the Short Pin in the Relay Block as shown.

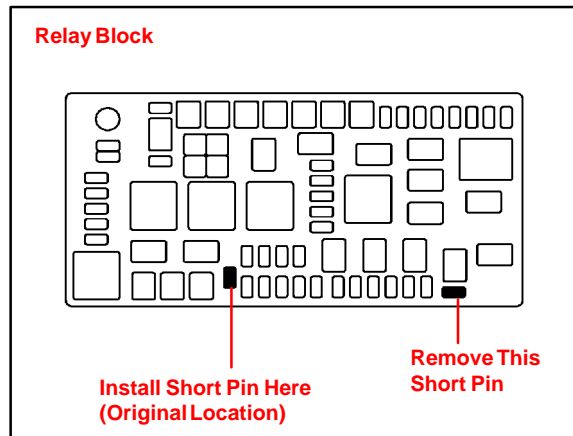

**NOTE:**

- Removing the Short Pin cuts off power sources relating to the DOME, RADIO No. 1, ECU-B and ECU-B No. 2 fuses.
- The Short Pin does not function as a fuse, so install it only in the position shown.
- If the vehicle is stored in the dealership for a long period of time after PDS, disconnect the negative battery terminal to prevent battery discharge. Refer to TSIB PG009-02 for battery maintenance information.

**Warranty Information**

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-

